



FIREARMS ARSENAL



**Tapered Pin A-2
Sight Post Reamers**



**180 Series
Slide Finishing
End Mill**

Designed specifically to machine Titanium, Inconel, and similar materials




**380 Series
9 Flute Finishing
End Mill**

Uneven number of flutes reduces harmonics to provide stable machining zones



**334 Series
Magazine Well
Rougher**

Chipbreaker design provides better part finish than a traditional knuckle rougher

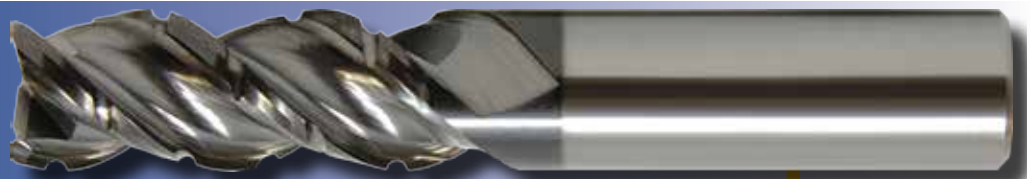

Offering for all tools on back cover

Rail Profile Cutter



Chamber Reamers

Made to order from 22 LR to 50 BMG.
Piloted & Non-piloted options available



Slot Cutters

Used for cutting notches
and key ways



279 Series Ball Nose End Mill

For radius grooves and cylinder fluting





The Custom Tool Division currently manufactures a variety of custom firearm solid carbide cutting tools. All of our firearms tools are custom made for the manufacturer's application. All tools are designed from customer prints or basic concepts provided from SAAMI specifications.

Tapered Pin Reamers	Made to order sizing	
180 Slide Finishing End Mills	1/4" - 1"	6.0 - 20.0 mm
380 9 Flute Finishing End Mills	3/8" - 3/4"	8.0 - 20.0 mm
334 Magazine Rougher	1/4" - 1"	N/A
Rail Cutters	Made to order sizing	
Chamber Reamers	Made to order sizing	
Slot Cutters	Made to order sizing	
279 Ball Nosed End Mills	1/8" - 3/4"	3.0 - 16.0 mm

M.A. Ford Mfg. Co., Inc.
 7737 Northwest Blvd.
 Davenport, IA 52806

Tel: 563-391-6220
 Toll free: 800-553-8024

sales@maford.com
 www.maford.com
 ISO 9001: 2015 Certified



Made in USA

⚠️ WARNING: This product can expose you to chemicals including nickel, cobalt, and lead, which are known to the State of California to cause cancer, and chemicals including lead which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Safety Note
 Always wear the appropriate personal protective equipment such as safety glasses and protective clothing when using solid carbide or HSS cutting tools. Machines should be fully guarded.

